



2" 15W Round LED Trimless Downlight 5CCT Selectable



Mud Frame

Decription


2" 15W Round LED Trimless Downlight 5CCT Selectable

Features


- * Durable airtight aluminum body
- * Type IC, Air-Tight & Wet - No Housing Required
- * Flangeless installation, provide a more high end looking
- * No housing required, easy and fast installation
- * 100%-10% dimming capability. This fixture is compatible with industry standard forward-phase / reverse-phase and TRIAC/ELV dimmers
- * Rated for long life - over 50,000 hours



DIMENSIONS

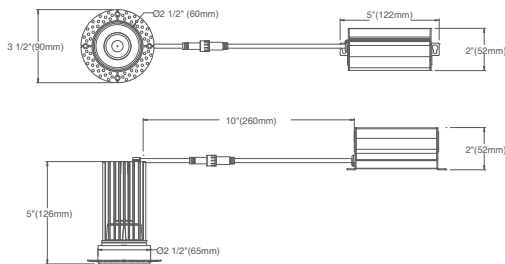


INSTALLATION

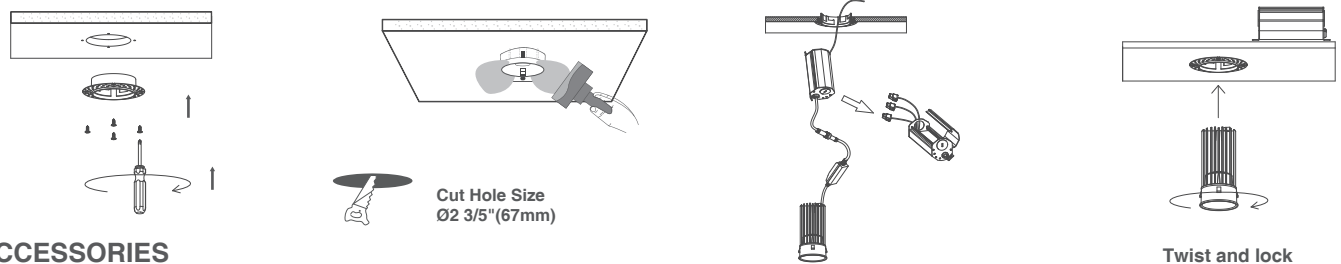

ACCESSORIES

Mounting Plates



DLDD-BRACKET-2"TL
 The DLDD-BRACKET-2"TL is a 3" new construction pre-mounting plate opening O2-7/8" (72mm)

Flexible Connector



FLEX-4/ 6/ 10/ 20
 4ft/ 6ft/ 10ft/ 20ft flexible connector

SPECIFICATIONS	
Model	DLDD-2TL-5CCT
Watts	15W
CRI	90Ra+
Color Temperature(K)	Field Selectable 2700K/3000K/3500K/4000K/5000K
Light Ouput(lm)	1000lm
Default Driver Input	AC120V, 60Hz
Dimming	Triac Dimming
Power Factor	>0.9
Approved Location	Wet Location
Air Tight	Yes
Operating Temp.	(-4°F~104°F) -20~40°C
Beam Angle	38°

PACKAGE	
Weight.(g)	511g
Qty/CTN (pcs)	18pcs/CTN
Box Dimension	L405xW275xH445mm
Gross Weight	6.98kg/CTN

INCLUDED IN BOX

- 2" 15W Round LED Trimless Downlight with Remote Driver
- 4 Screws

