

LED UFO HIGH BAY



A unique feature for this fixture is the quick disconnected cable, it can quickly separate the driver from the LED module for easy maintenance. The unit has built-in heat sink and comes with a hook made of die-cast aluminum for a strong and easy installation.




Product Features


- ★ DLC 5.1 Premium with high luminous efficiency and low UGR;
- ★ Simple and stylish appearance;
- ★ Excellent heating dissipation;
- ★ Branded driver and LED's;
- ★ Microwave Sensor, PIR Motion sensor, Motion Sensor with Bluetooth ;
- ★ Very complete accessories for option.

Product Dimension

1. Rings type:



2. Hook type:



Product Parameters


Model Number	Wattage	Working Voltage	CCT	Lamp Bead Model	Beam Angle	Lighting Efficiency	Color Rendering Index	Operating Temperature	Storage Temperature	Environment Location	Life span	Lamp shell
HBR-100W-80-H-XXK(XX)	100W	AC 100-277V	4000K 5000K 5700K	2835 LUMILEDS	80°	140lm/W	Ra>80	-40°F~113°F -40°C~45°C	-40°F~158°F -40°C~70°C	Wet Location	≥50000H	Black & White

"(XX)" can be (MS),(PIR),(BRT) to indicate Microwave Sensor, PIR Motion sensor, Motion Sensor with Bluetooth or blank to indicate without Motion Sensor.


Installation Instruction

Rings type


1 Lock the ring.



2 Tighten the screw.
(This step can be omitted if there is no screw hole.)




3 Hang up the light.




Hook type


1 Lock the hook.




2 Tighten the screw.
(This step can be omitted if there is no screw hole.)



3 Hang up the light.



4 Lock the screw.




Adjust power and color temperature installation

1. Use a screwdriver to remove the fixing screws, as shown in Figure 1.




2. Remove the fixing screws and cover plate, as shown in Figure 2.




Adjust power and color temperature installation

3. Flip the color temperature switch to the desired color temperature, flip the power switch to the desired wattage, as shown in Figure 3.

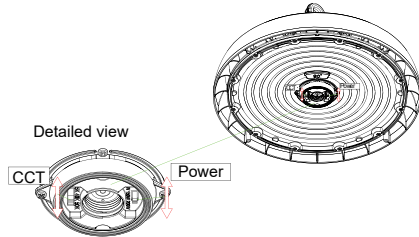


4. Restore the installation in the order of Step 321, as shown in Figure 4.




Sensor installation


1. Unscrew the plug screws using screws, as shown in Figure 1.




2. Remove the plug screw, as shown in Figure 2.



3. Screw the sensor into the base, as shown in Figure 3.



4. Sensor installation, as shown in Figure 4.



Packing Information


Power	Outer box (L*W*H)	Oty/Ctn (pcs)	N.W./Ctn (kg/lbs)	G.W./Ctn (kg/lbs)	Remarks
100W	12.20"x12.20"x6.77" (310x310x172mm)	1	1.834/4.04	2.33/5.14	0.5M cable

Wiring Connection


Turn off the power, connect AC wire. Black wire to L, white wire to N, and green wire to PE.

Dimmer connection (with dimmable driver.)

1. Compatible with 0-10V dimming.
2. Connect wires as below, purple wire is D+, pink wire is D-, cap red wire.

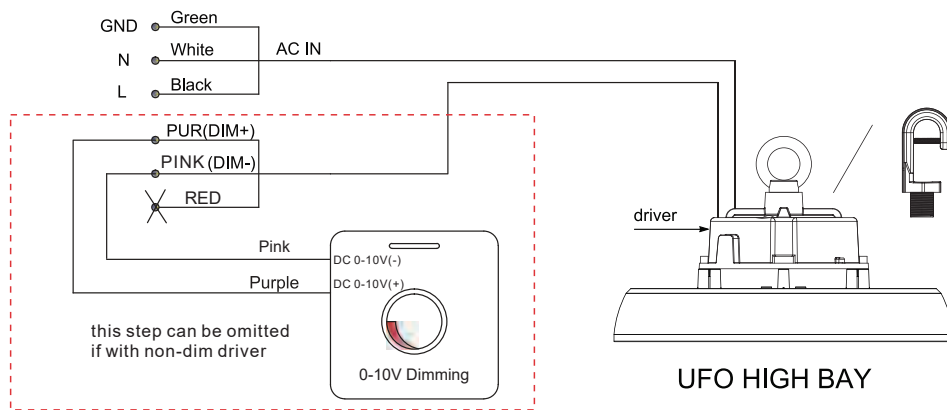

Applications

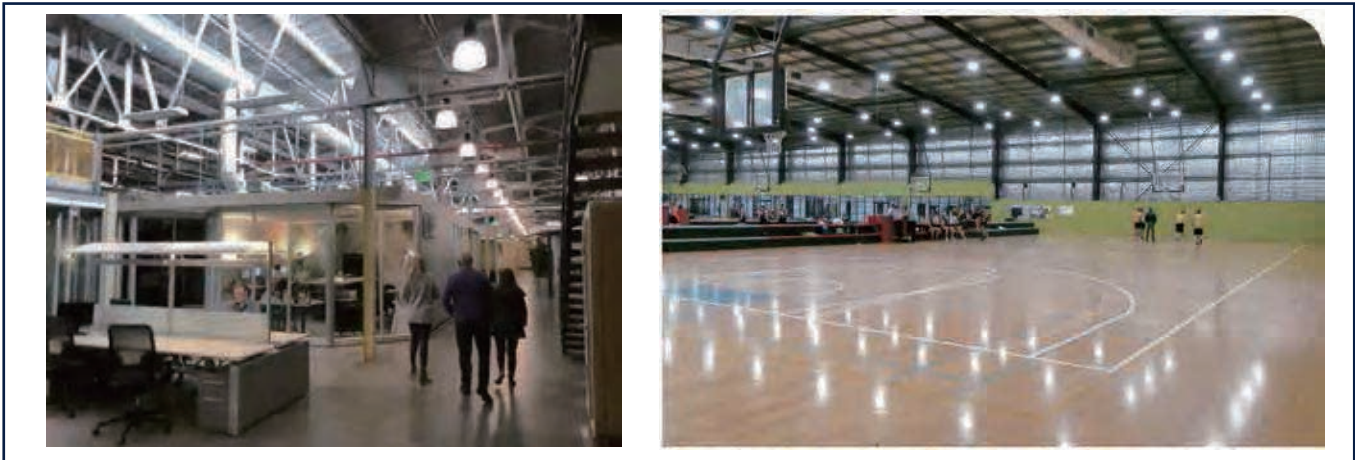

Note

1. Please let professionals install the lamp;
2. Please cut off the power supply if any abnormal situation;
3. Please clean the glass of high bay light regularly, to keep great lighting transmission;
4. Please clean the high bay light shell termly, to keep good heat dissipation;
5. Please use the dry cloth to clean it only, not by water or caustic solution;
6. Lamp earthing is necessary;
7. High voltage inside, please don't remove it in case of electric shock;
8. Glass accessory included, please take care of it when using and storage, avoid high pressure on it;