




Quick Connector

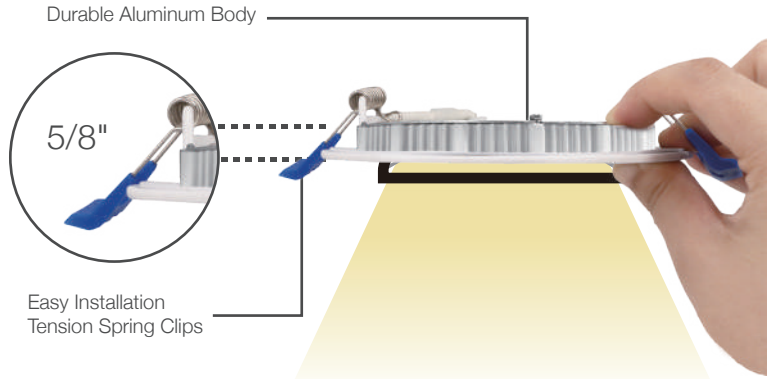

Durable Aluminum Body

5/8"

Easy Installation
Tension Spring Clips


Low-profile, edge-lit design

Features


- Edge-lit technology, no glare or dark spots, instant-on
- No existing recessed housing or junction box required
- Dimming: TRIAC down to 10%
- I.C. rated for direct contact with insulation
- Suitable for WET LOCATION
- Rated for a long life - over 50,000 hours
- 5-color field selectable CCT - 2700K, 3000K, 3500K, 4000K, 5000K



DIMENSIONS

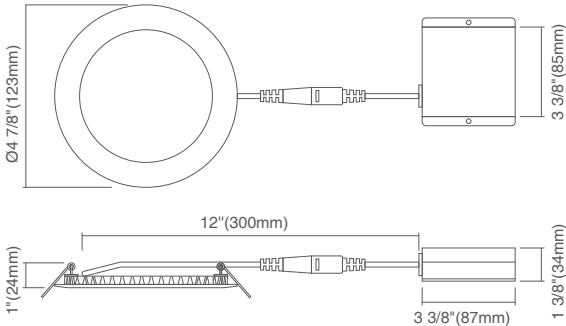

INSTALLATION

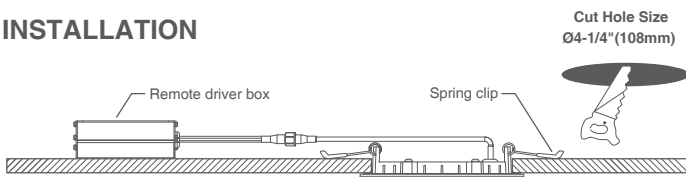

Cut Hole Size
Ø4-1/4" (108mm)

Accessories

Extension Cables



FLEX-4
4ft flexible connector,
for use with Gimbal/ s
lim LED fixtures



FLEX-10
10ft flexible connector,
for use with Gimbal/
slim LED fixtures



FLEX-6
6ft flexible connector,
for use with Gimbal/ s
lim LED fixtures



FLEX-20
20ft flexible connector,
for use with Gimbal/
slim LED fixtures

Decorative Trim Ring



4 inch Round
ADET4-BK
ADET4-BZ
ADET4-BN
ADET4-CP

Black (BK) Rubber Oil Bronze (BZ) Brushed Nickel (BN) Cooper (CP)

Goof Ring



ADGR4-WH
4" Goof Ring
Inside Diameter - 4 3/16" (106.8mm)
Outside Diameter - 5 3/4" (146mm)
Thickness - 1mm
for use with Gimbal/ slim LED fixtures

Mounting Plate



MP4-3
The MP4-3 is a 4" new construction pre-mounting plate
Opening Ø4 1/4" (108mm)



MP4
The MP4 is a 4" new construction pre-mounting plate with collar for use with screw down "C" style
Opening Ø4 3/8" (110mm)




MP-UNV-346
The MP-UNV-346 is a 3/4" x 6" new construction pre-mounting plate
opening Ø3" (75mm), Ø4-3/8" (110mm), Ø6-1/4" (160mm)

SPECIFICATIONS	
Model	DLDD4-3CCT-6P
Watts	12W
Light Output(lm)	900lm
Size	4in
Default Driver Input	AC120V,60HZ
Color Temperature(K)	3-color field selectable CCT - 3000K, 4000K, 5000K
CRI	90Ra (80Ra Optional)
Dimming	Triac Dimming
Power Factor	>0.9
Approved Location	Wet Location
Air Tight	Yes
Operating Temp.	(-4°F~-104°F) -20~40°C
Beam Angle	120°

PACKAGE	
Weight.(g)	332g
Qty/CTN (pcs)	18pcs/CTN
Box Dimension	440*280*230mm
Gross Weight	7.58kg/CTN

4" Square LED Slim Downlight

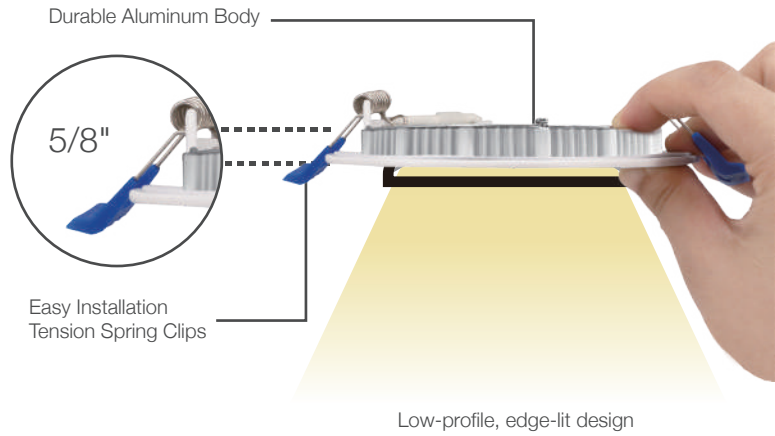


Features

- Edge-lit technology, no glare or dark spots, instant-on
- No existing recessed housing or junction box required
- Dimming: TRIAC down to 10%
- I.C. rated for direct contact with insulation
- Suitable for WET LOCATION
- Rated for a long life - over 50,000 hours
- 5-color field selectable CCT - 2700K, 3000K, 3500K, 4000K, 5000K



DIMENSIONS

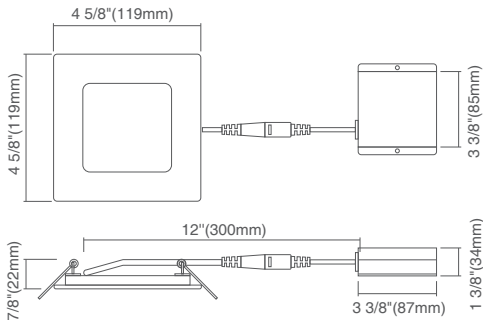

INSTALLATION



Accessories

Extension Cables



FLEX-4
4ft flexible connector,
for use with Gimbal/
slim LED fixtures



FLEX-6
6ft flexible connector,
for use with Gimbal/
slim LED fixtures



FLEX-10
10ft flexible connector,
for use with Gimbal/
slim LED fixtures



FLEX-20
20ft flexible connector,
for use with Gimbal/
slim LED fixtures


Mounting Plate



MP4
The MP4 is a 4" new construction pre-mounting plate with collar for use with screw down "C" style remodel housings
Opening Ø4 3/8"(110mm)



MP4-3
The MP4-3 is a 4" new construction pre-mounting plate
Opening Ø4 1/4"(108mm)



MP-UNV-346
The MP-UNV-346 is a 3 3/4" x 6" new construction pre-mounting plate opening Ø3"(75mm), Ø4-3/8"(110mm), Ø6-1/4"(160mm)

4 Inch Decorative Trim



Square
Deep Bronze
AEETS4-BZ



Square
Brushed Nickel
AEETS4-BN



Square
Black
AEETS4-BK



Square
Cooper
AEETS4-CP

SPECIFICATIONS	
Model	DLDD4-SQ-3CCT
Watts	11W
Light Output(lm)	700lm
Size	4in
Default Driver Input	AC120V,60HZ
Color Temperature(K)	3-color field selectable CCT - 3000K, 4000K, 5000K
CRI	90Ra (80Ra Optional)
Dimming	Triac Dimming
Power Factor	>0.9
Approved Location	Wet Location
Air Tight	Yes
Operating Temp.	(-4°F-104°F) -20-40°C
Beam Angle	120°

PACKAGE	
Weight.(g)	405g
Qty/CTN (pcs)	18pcs/CTN
Box Dimension	465*275*250mm
Gross Weight	8kg/CTN