




2 HOUR FIRE RATING
Tested to comply with UL 263,
ASTM E119 & CAN ULC S101

FEATURES


- 2-Hour fire rating providing a reinforced and heat resistant steel casing
- Selectable color temperature: 27K, 3K, 35K, 4K & 5K
- Junction box with commercial grade driver included
- Triac Dimmable, Certified airtight, IC rated
- Easy installation - NO ADDITIONAL BOX REQUIRED



DIMENSION

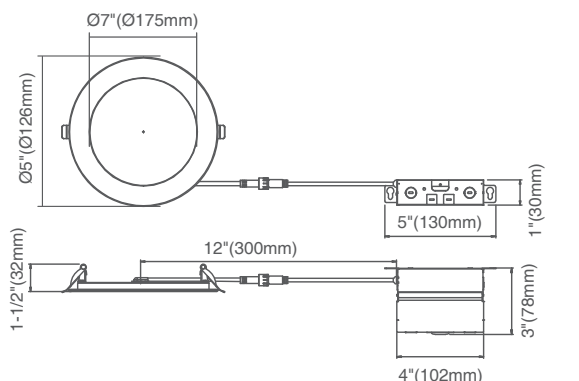

INSTALLATION

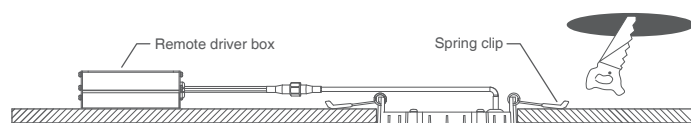

SPECIFICATIONS	
Model	FDLDD6-5CCT-FR
Watts	15W
Light Output(lm)	1100lm
Size	6in
Default Driver Input	AC120V,60HZ
Color Temperature(K)	5-color field selectable CCT - 2700K, 3000K, 3500K, 4000K, 5000K
CRI	90Ra (80Ra Optional)
Dimming	Triac Dimming
Power Factor	>0.9
Approved Location	Wet Location
Air Tight	Yes
Operating Temp.	(-4°F~104°F) -20~40°C
Beam Angle	120°

PACKAGE	
Weight.(g)	366g
Qty/CTN (pcs)	18pcs/CTN
Box Dimension	555*375*190mm
Gross Weight	8.78kg/CTN

Accessories

Extension Cables



FLEX-4
4ft flexible connector,
for use with Gimbal/ s
lim LED fixtures



FLEX-6
6ft flexible connector,
for use with Gimbal/ s
lim LED fixtures




FLEX-10
10ft flexible connector,
for use with Gimbal/
slim LED fixtures



FLEX-20
20ft flexible connector,
for use with Gimbal/
slim LED fixtures

Mounting Plates




MP-UNV-346

The MP-UNV-346 is a 3 1/4" x 6" new construction pre-mounting plate opening Ø3"(75mm), Ø4-3/8"(110mm), Ø6-1/4"(160mm)



MP6

The MP6 is a 6" new construction pre-mounting plate Ø6-1/4"(159mm)



MP6-1

The MP6-1 is a 6" new construction pre-mounting plate Ø6-1/4"(159mm)

Decorative Trim Ring



Black (BK) Brushed Nickel (BN)
Rubber Oil Bronze (BZ) Cooper (CP)

6 inch Round

ADET6-BK
ADET6-BZ
ADET6-BN
ADET6-CP