




Mini Die-Cast LED Step Lights



With Frosted Acrylic Lens
(Horizontal or Vertical Mounting)

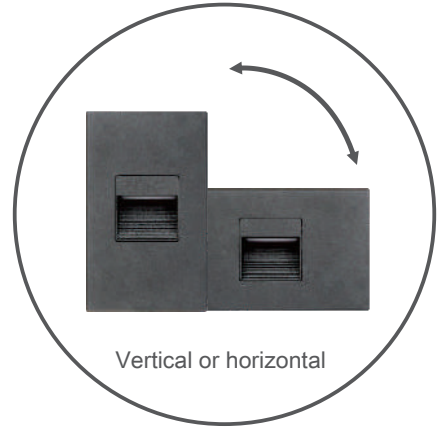

Vertical or horizontal



Steel




Lumen Output

Features


- Vertical or horizontal mounting
- Galvanized stamped steel housing
- Energy saving photocell automatically turns unit on in the dark
- Easy to install on a single gang receptacle box (not included)
- Integrated LED board and driver
- Suitable for WET LOCATION



DIMENSION

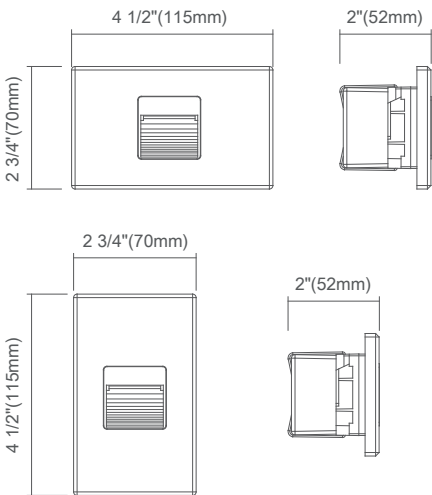

INSTALLATION

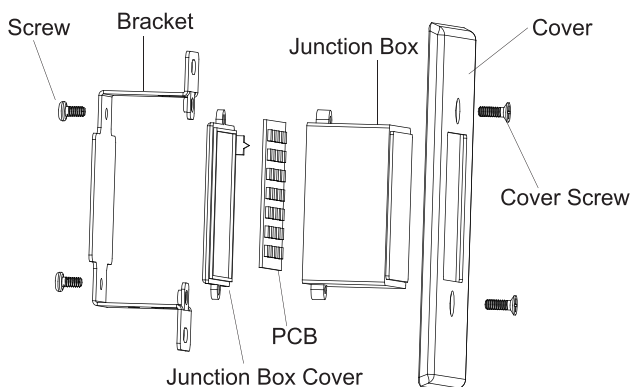

SPECIFICATIONS	
Model	Step Light 1G BK / Step Light 1G WH
Watts	2.5W
Light Output(lm)	125lm
CCT'S	3000K,4000K,5000K
CRI	90Ra+ (80Ra Optional)
Input Voltage	AC120V
Dimming	Triac Dimming
Power Factor	>0.9
Approved Location	Wet Location
Operating Temp.	(-4°F~104°F) -20~40°C
Beam Angle	38°

PACKAGE	
Weight.(g)	250g
Qty/CTN (pcs)	18pcs/CTN
Box Dimension	375*240*150mm
Gross Weight	5.5kg/CTN