




STERLING LED LIGHTING CONCEPTS

Electrical | LED Lighting

Unit 101-7808, 132 st, Surrey, BC, V3W 4N1 | Office: 604.593.3130
www.sterlinghardware.ca

DESCRIPTION

The LED commercial strip light maximizes energy savings and is designed for multiple applications including new construction. This fixture can be used for warehouse, parking garages, stairwells, offices, hallways and many other applications in industrial and commercial. Types of installation include ceiling, wall, chain or cable mounting. Our commercial strip light is very versatile, efficient and is available up to 10,000 Lm, with option and availability for pre-installed Bi-level motion sensor.

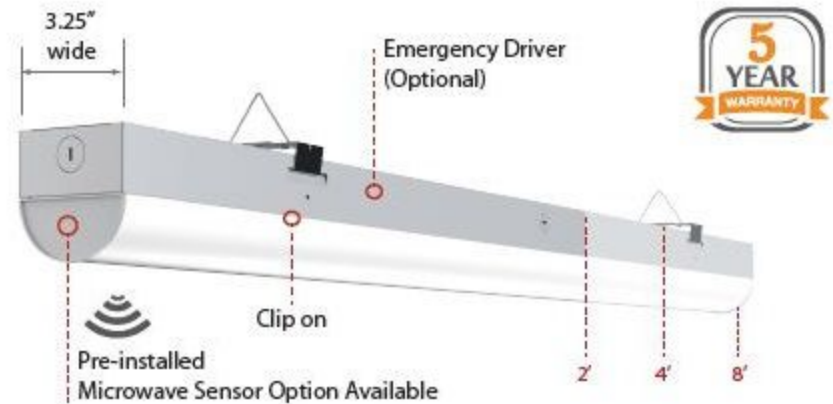

*Available in 2-ft, 4-ft, & 8-ft of length



FEATURES

- DLC Premium
- Suitable for damp location
- Easy installation clip on
- Material: Steel and PC lens
- Available in 2', 4' or 8' length
- Microwave motion sensor available
- Input line voltage: 120-277V
- Input current: 0.17A
- Power Factor: >0.9
- Dimmable: 0-10V
- CRI: 80
- THD<20
- Surge protect level: 4KV
- Operating temperature: -22°F - 122°F

ACCESSORIES

Emergency Driver



Motion/Daylight Sensor



347-480V to 277 Step Down Drive



Wireguard



APPLICATIONS

- Warehouse Lighting
- Retail Lighting
- Parking Garage
- Stairwells and Hallways
- Storage Lighting

WARRANTY


- 5 Year Warranty

ORDERING

*P= Premium DLC / *S = Standard DLC

Watts (W)	Color Temp (K)	Lumens (lm)	Equiv. Wattage (W)	Size	Rated Hrs	DAMP LOCATION	DLC (S/P)
35	4000K	5,412	3x 32W T8	3.25"x48"	50,000	•	P
35	5000K	5,472	3x 32W T8	3.25"x48"	50,000	•	P
20	4000K	3,285	3x 17W T8	3.25"x24"	50,000	•	P
20	5000K	3,357	3x 17W T8	3.25"x24"	50,000	•	P
25	4000K	3,958	2x 32W T8	3.25"x48"	50,000	•	P
25	5000K	4,007	2x 32W T8	3.25"x48"	50,000	•	P
35	4000K	5,412	3x 32W T8	3.25"x48"	50,000	•	P
35	5000K	5,472	3x 32W T8	3.25"x48"	50,000	•	P
42	4000K	6,666	4x 32W T8	3.25"x96"	50,000	•	P
42	5000K	6,797	4x 32W T8	3.25"x96"	50,000	•	P
56	4000K	8,600	5x 32W T8	3.25"x96"	50,000	•	P
56	5000K	8,661	5x 32W T8	3.25"x96"	50,000	•	P
68	4000K	10,644	6x 32W T8	3.25"x96"	50,000	•	P
68	5000K	10,749	6x 32W T8	3.25"x96"	50,000	•	P

SPECIFICATIONS



Size	Length (L)	Width (W)	Height(H)
2 ft	24" (609mm)	3.25" (83mm)	3.31" (84mm)
4 ft	48" (1219mm)	3.25" (83mm)	3.31" (84mm)
8 ft	96" (2440mm)	3.25" (83mm)	3.31" (84mm)