


LED Strip Light

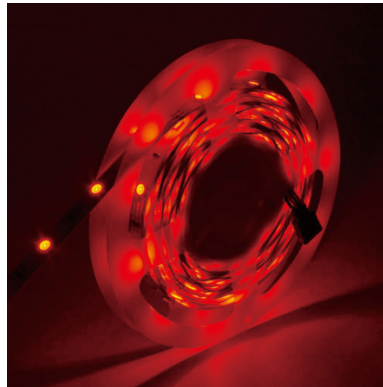

Specifications

LED Type	5050
LED Brightness	2200-2600MCD
LED Density	30 pcs/m
Cuttable Segments	3 LEDs 100 mm
PCB Type/Color	2 oz , White PCB
Dimension:	5000*10mm
Max Run Length	5 m
Package	5 m/bag

Input Voltage	12V DC / 24V DC
Peak Power (w/m)	7.2 w/m
Power Per Roll (5 meters)	36 w/roll
Lumen (Lm/m)	/
Ra	/
IP Grade	IP20/IP54/IP65/IP67/IP68
Warranty	3 Years
Certification	UL CE RoHS

Typical Color

Color	CCT Wavelength
RGB	

Lumen Count

Color	Per Meter
RGB	

NOTES: More customized colors, please contact our sales .

Packing Information

Standard Packing Per Bag

5 meters/reel, 1 reel/anti-static bag
G.W. : Non-waterproof-0.20KG

Standard Packing Per Outer Carton

25 bags to 1 inner box, size: 33.5x20x24cm
4 inner boxes to 1 outer carton size: 42x35x46cm
G.W of Carton: 13.8 kg
Volume of Carton: 0.068 m³

NOTES

1. STERLING LED LIGHTING LED Strip maintains a tester tolerance of $\pm 5\%$ on Color Temperature and Lumen , tolerance of ± 3 on CRI-Ra
2. The test is based on the STERLING LED LIGHTING's laboratory and testing equipment.
3. We reserve the right to modify and improve the design of our fixtures without prior notice.